




# 1228 Air - Water Hose

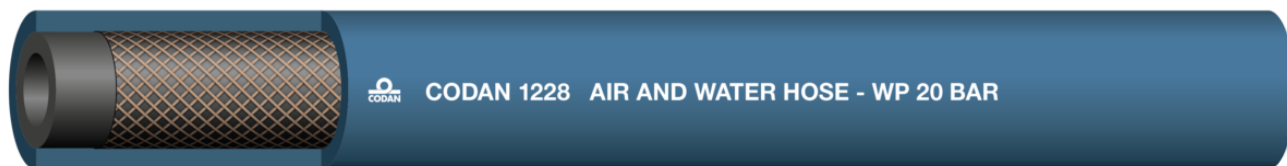

## DESCRIPTION

Blue water hose for use where a flexible, hard-wearing, weather and ozone-resistant hose is required. Peak temp. 160°C. We recommend crimp on fittings.

Please contact Codan for further information.

**ATTENTION, read before use:** [Click here to download Burst Pressure Diagram](#)

## ADDITIONAL INFORMATION

Type no.	1228
Application	Air – water hose
Standard length	50 metres
Working temp.	-30°C to 140°C
Inside compound	EPDM
Inside colour	Black
Reinforcement	High Strength Synthetic Textile Yarns
Outside compound	EPDM
Outside colour	Blue
Standards	–
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
6,3	13,0	20	60	40	152	1228006000
9,5	16,5	20	60	50	230	1228010000
12,7	21,5	20	60	65	360	1228013000
19,0	27,0	20	60	105	450	1228019000
25,0	35,0	20	60	145	800	1228025000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.