




1235 Air - Water Hose

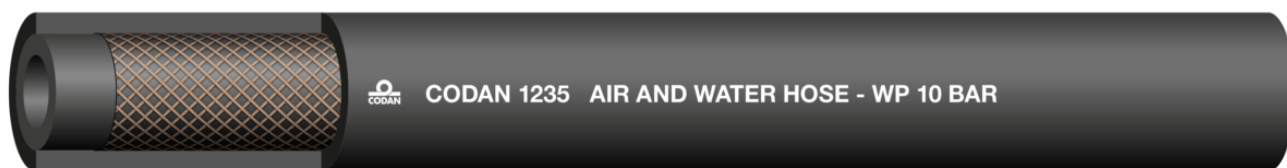

DESCRIPTION

Black universal air/water hose for industrial use, e.g. in the building and construction, shipbuilding and mining sectors.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	1235
Application	Air – water hose
Standard length	50 metres
Working temp.	-30°C to 70°C
Inside compound	EPDM
Inside colour	Black
Reinforcement	PVA
Outside compound	EPDM
Outside colour	Black
Standards	–
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
6,3	12,5	10	50	44	135	1235006000
8,0	14,4	10	50	56	165	1235008000
10,0	17,0	10	50	70	215	1235010000
12,5	20,5	10	50	88	300	1235013000
16,0	25,0	10	50	112	420	1235016000
20,0	30,0	10	50	140	560	1235019000
25,0	35,0	10	50	175	1120	1235019000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.