




1240 Air - Water Hose

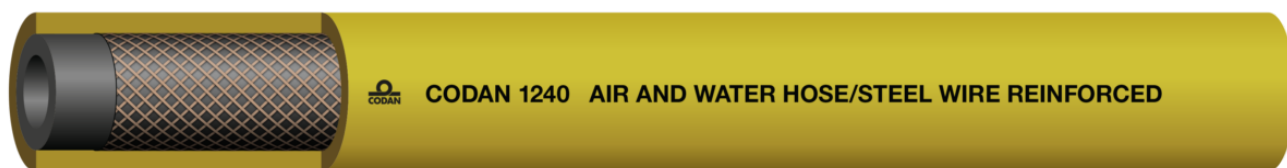

DESCRIPTION

Yellow, steel-reinforced, sturdy compressed-air hose. High resistance to compression, yet highly flexible. Resistant to oil spray and water temperatures up to 90°C.

For use on buildingsites and oil rigs where great demands are made on the hose with regard to both suction and pressure. Crimp-on fittings are recommended for this hose type.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	1240
Application	Air – water hose
Standard length	40 metres
Working temp.	-30°C to 90°C
Inside compound	NBR
Inside colour	Black
Reinforcement	Spiralised steel wires
Outside compound	NBR/PVC
Outside colour	Yellow
Standards	–
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
13,0	24,0	40	185	91	590	1240013000
19,0	30,0	40	139	133	790	1240019000
25,0	38,0	40	168	175	1000	1240025000
32,0	47,0	40	173	224	1570	1240032000
38,0	53,0	40	281	266	1990	1240038000
51,0	66,0	40	222	357	2480	1240051000
63,0	82,0	40	173	441	3330	1240063000
76,0	94,0	35	147	532	3910	1240076000
102,0	126,0	28	110	714	6350	1240102000
127,0	152,0	24	90	889	7790	1240127000
152,0	177,0	24	77	1064	9180	1240152000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.