




1600 Material Handling Hose

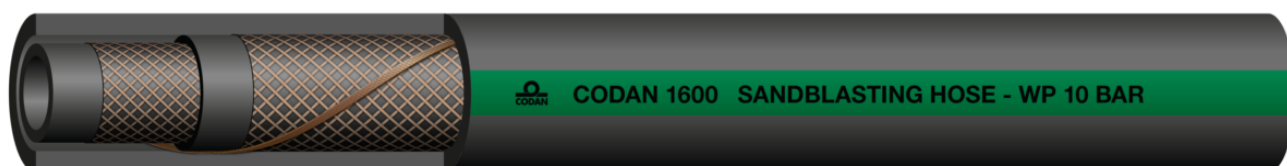

DESCRIPTION

Black, flexible, wrapped pressure hose with strong, particularly hard-wearing inner lining which is anti-static. Discharge is also ensured by the anti-static wire incorporated in the hose. For use in sandblasting and cleaning of metal, stone, concrete, etc.

Installed using special sand-blasting connectors.

Abrasion resistance (ISO 4649): $70 \pm 5 \text{ mm}^3$

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	1600
Application	Sandblasting
Standard length	40 metres
Working temp.	-30°C to 80°C
Inside compound	NR
Inside colour	Black
Reinforcement	Polyester – Anti-static wire
Outside compound	SBR
Outside colour	Black
Standards	–
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
13,0	25,0	10	30	-	480	1600013000
16,0	30,0	10	30	-	630	1600016000
19,0	33,0	10	30	-	780	1600019000
25,0	39,0	10	30	-	950	1600025000
32,0	48,0	10	30	-	1330	1600032000
38,0	56,0	10	30	-	1640	1600038000
42,0	60,0	10	30	-	1790	1600042000
51,0	73,0	10	30	-	2590	1600051000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.