




1605 Material Handling Hose

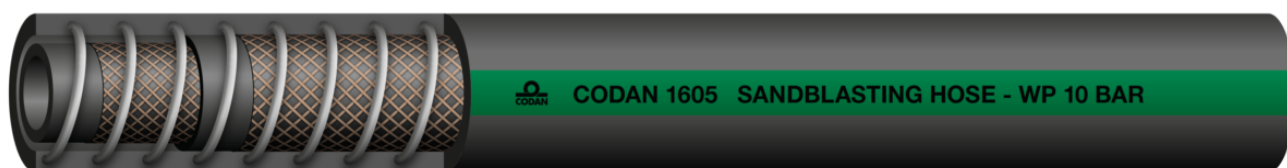

DESCRIPTION

Abrasion resistant softwall hose, used for the delivery of sand or cast steel shot. It is manufactured with an antistatic rubber compound. Also available in other dimensions and length upon request.

Contact CODAN for further information.

ADDITIONAL INFORMATION

Type no.	1605
Application	Sandblasting
Standard length	40 metres
Working temp.	-40°C to 70°C
Inside colour	Black
Reinforcement	High Strength Cord
Outside compound	SBR/NR
Outside colour	Black
Standards	–
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
19,0	33,0	10	30	175	690	1605019000
25,0	39,0	10	30	190	790	1605025000
32,0	48,0	10	30	205	1080	1605032000
38,0	56,0	10	30	220	1580	1605038000
42,0	60,0	10	30	230	1600	1605042000
51,0	73,0	10	30	250	2150	1605051000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.