




2206 Oil Hose

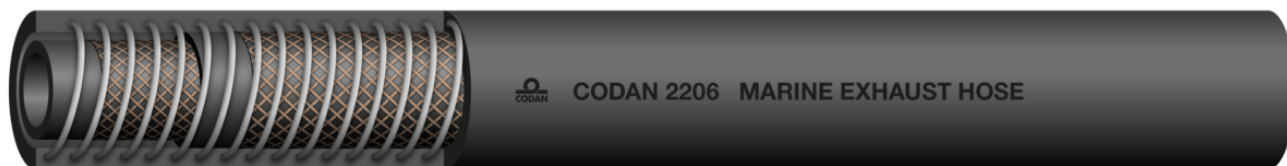

DESCRIPTION

Black, wrapped, high-quality hose approved for use as wet diesel exhaust pipe on boats less than 15 m in length. Approved by Lloyds. 2 steel wire helices and 2 nylon plies up to diam 102mm included, for larger sizes 2 rayon plies and 2 steel wire helices allows the hose to be bent without kinking in small engine compartments with limited access. Fire-retardant outer rubber coating. Normally installed using heavy-duty hose clamps tightened with Allen key.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	2206
Application	Marine Exhaust
Standard length	–
Working temp.	-40°C to 100°C
Inside compound	NR/SBR
Inside colour	Black
Reinforcement	2 nylon plies w/2 steel wire
Outside compound	NR/SBR
Outside colour	Black
Standards	LLOYDS
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
19,0	27,0		10	82	490	2206019000
22,0	30,0		10	95	560	2206022000
25,0	33,0		10	110	620	2206025000
28,0	36,0		10	125	680	2206028000
32,0	40,0		10	140	760	2206032000
38,0	47,0		10	170	1040	2206038000
40,0	49,0		10	180	1080	2206040000
45,0	54,0		10	200	1200	2206045000
51,0	60,0		10	230	1410	2206051000
55,0	64,0		10	255	1600	2206055000
60,0	70,0		10	270	1840	2206060000
63,5	73,5		10	290	1930	2206063000
65,0	75,0		10	300	1980	2206065000
76,0	86,0		10	380	2320	2206076000
80,0	90,0		6	400	2430	2206080000
90,0	100,0		6	400	2920	2206090000
102,0	113,0		6	460	3330	2206102000
110,0	124,0		6	480	4760	2206110000
120,0	134,0		6	500	5180	2206120000
127,0	140,0		6	650	5440	2206127000
140,0	154,0		6	680	5970	2206140000
152,0	168,0		6	700	7780	2206152000
203,0	223,0		6	1400	11840	2206203000

need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.