




2315 Chemical Hose

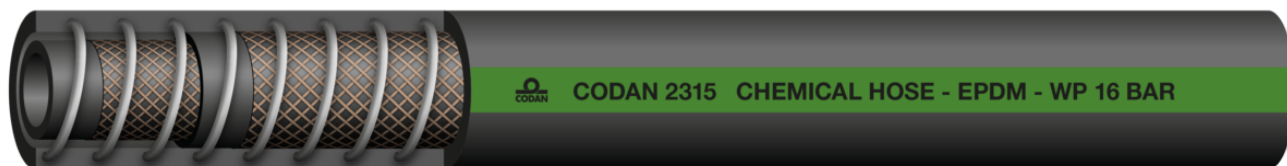

DESCRIPTION

Black, wrapped suction and pressure hose with double steel helix and charge eliminator wire. Note! The wire must be connected to the fittings at both ends to ensure complete electrical discharge. For use in industrial applications, e.g. as flexible connection between pipelines and tanks/tankers. Suitable for acids and other chemicals.

Vacuum: 90%. For maximum safety, please consult the chemical resistance list. Normally installed using DIN clamps.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	2315
Application	Chemicals – EPDM
Standard length	40 metres
Working temp.	-30°C to 150°C
Inside compound	EPDM
Inside colour	Black
Reinforcement	Polyester w/ double steel helix and anti-static wire
Outside compound	EPDM
Outside colour	Black
Standards	–
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
19,0	30,6	16	50	95	710	2315019000
25,0	37,8	16	50	125	1060	2315025000
32,0	46,4	16	50	160	1300	2315032000
35,0	49,0	16	50	175	1340	2315035000
38,0	52,4	16	50	190	1460	2315038000
51,0	65,4	16	50	250	1950	2315051000
63,0	79,0	16	50	350	2930	2315063000
76,0	93,2	16	60	450	3480	2315076000
102,0	122,4	16	50	610	5770	2315102000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.