




2637 Material Handling Hose

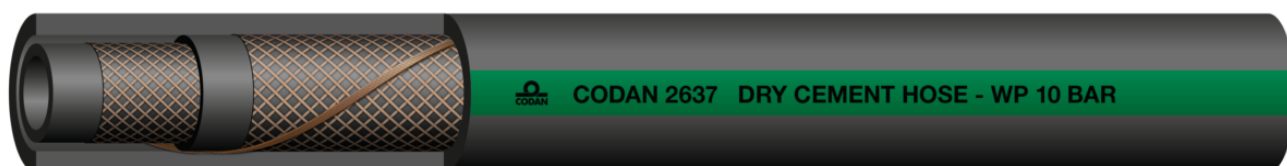

DESCRIPTION

Mandrel built hose for concrete wet/dry, cement, plaster, granulated and abrasives materials in general. White NR rubber liner with excellent abrasion resistance. High strength polyester textile yarns. Antistatic copper wire for static electricity dissipation. Intermediate rubber layer assuring perfect adhesion between lining and cover.

Please contact CODAN for further information.

ADDITIONAL INFORMATION

Type no.	2637
Application	Dry cement
Standard length	50 metres
Working temp.	-25°C to 70°C
Inside compound	NR
Inside colour	Black
Reinforcement	Polyester
Outside compound	EPDM
Outside colour	Black
Standards	–
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
55,0	74,4	10	30	270	2450	26370550000
75,0	97,0	10	30	400	4340	26370750000
102,0	134,0	10	30	500	8920	26371020000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.