




3024 Hydraulic Hose

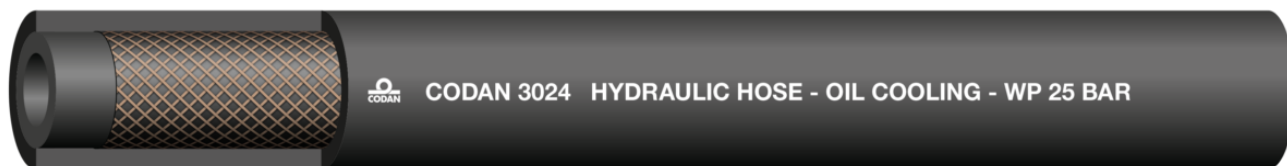

DESCRIPTION

Black, flexible hose for hydraulic oils, diesel oil, etc. Capable of withstanding temperatures of max. +140°C for brief periods, making it ideal for oil cooling on high-performance cars, motorcycles, boats, etc. Crimped-on low-pressure fittings are recommended for this hose type.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	3024
Application	Low-pressure Hydraulics
Standard length	50 metres
Working temp.	-40°C to 125°C
Inside compound	NBR
Inside colour	Black
Reinforcement	Polyester
Outside compound	CR
Outside colour	Black
Standards	OLN
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
4,0	10,2	25	75	30	99	3024004000
6,0	12,4	25	75	36	132	3024006000
8,0	14,4	25	75	42	160	3024008000
9,0	15,4	25	75	45	174	3024009000
9,5	15,9	25	75	46	181	3024095000
10,0	16,4	25	75	48	187	3024010000
11,0	18,2	18	55	54	235	3024011000
12,0	20,2	14	42	60	295	3024012000
13,0	22,0	14	42	66	351	3024013000
15,0	24,0	14	42	72	391	3024015000
16,0	25,0	14	42	75	410	3024016000
20,0	30,0	12	36	90	557	3024020000
28,0	40,0	12	36	120	904	3024028000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.