



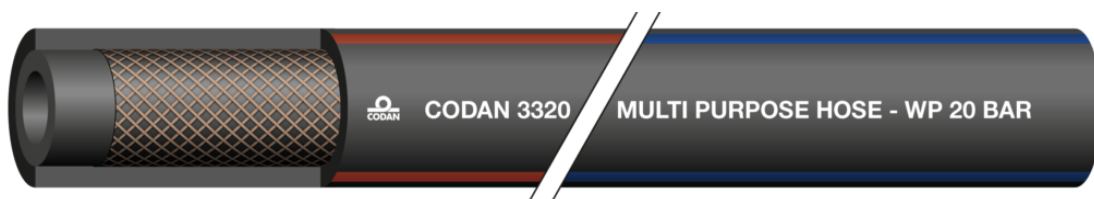

3320 Air - Water Hose



DESCRIPTION

Black, flexible universal hose for air and water. Available with either blue or red stripes. Electrically conductive liner prevent the build-up of static electricity; $R < 10^6 \Omega$ in accordance with EN ISO 8031: 1997.

High-quality EPDM inside and outside ensures good weather and ozone resistance in any environment. For use in industrial applications for cold and hot water, compressed air and chemicals (acids excepted). Resistant to acetates and ketones.

Please contact Codan for further information.

ADDITIONAL INFORMATION

| | |
|------------------|-------------------|
| Type no. | 3320 |
| Application | Air – water hose |
| Standard length | 50 metres |
| Working temp. | -40°C to 95°C |
| Inside compound | EPDM |
| Inside colour | Black |
| Reinforcement | PVA |
| Outside compound | EPDM |
| Outside colour | Black |
| Standards | EN ISO 8031: 1997 |
| Std. branding | – |

| Inside dia. (mm) | Outside dia. (mm) | Working Pressure BAR | Burst Pressure BAR | Bend Radius (mm) | Weight (g/m) | Product code |
|---------------------|----------------------|-------------------------|-----------------------|---------------------|-----------------|-----------------|
| 6,0 | 13,0 | 20 | 60 | 40 | 150 | 3320006000 |
| 8,0 | 15,0 | 20 | 60 | 50 | 180 | 3320008000 |
| 10,0 | 17,0 | 20 | 60 | 60 | 210 | 3320010000 |
| 13,0 | 21,0 | 20 | 60 | 80 | 300 | 3320013000 |
| 16,0 | 24,0 | 20 | 60 | 100 | 350 | 3320016000 |
| 19,0 | 28,0 | 20 | 60 | 115 | 470 | 3320019000 |
| 25,0 | 35,0 | 20 | 60 | 150 | 670 | 3320025000 |

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.