




3418 Fuel Hose

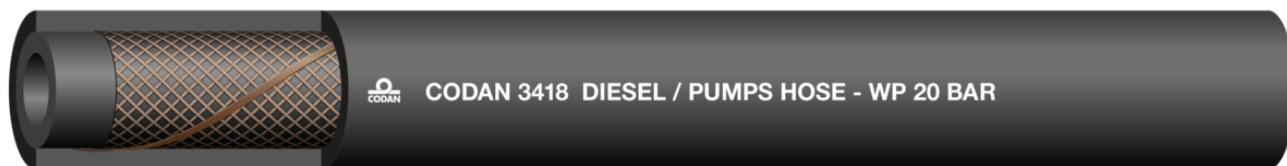

DESCRIPTION

Black, smooth, flexible hose with fabric reinforcement (single charge eliminator wire) for use on petrol pumps. The hose inner compound has a resistance of $49 \text{ K}\Omega (49 \times 10^3)$ making it conductive. Specially designed for low temperatures. Good weather and ozone resistance, with hard-wearing outer surface. Fits standard, reusable, brass petrol pump connectors.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	3418
Application	Diesel / Pumps, Fuel hose
Standard length	50 metres
Working temp.	-55°C to 80°C
Inside compound	NBR
Inside colour	Black
Reinforcement	PVA, Anti-static wire
Outside compound	CR
Standards	—
Std. branding	—

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
19,1	31,1	20	80	125	647	3418019000
25,4	37,4	20	80	150	803	3418025000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.