




4084 Gas Hose

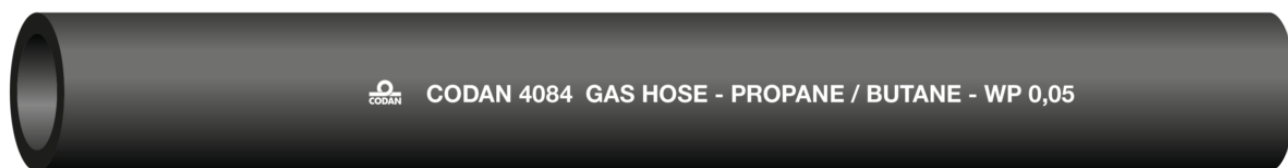

DESCRIPTION

Black LPG/Gas tubing, non-reinforced, for lowpressure applications. Manufactured to EN1763-1:2000 and is DG0553 approved. For use in testequipment and laboratories.

The working pressure for this hose is 0.1 bar. Normally installed using hose clamp on brass nozzle. Please contact Codan for further information.

Important: The European Committee For Standardization has introduced new standards for LPG hoses: EN16436-1 2014. [Click here to read about the new regulations.](#)

ADDITIONAL INFORMATION

Type no.	4084
Application	LPG / Propane / Butane
Standard length	–
Working temp.	-30°C to 90°C
Inside compound	NBR
Inside colour	Black
Reinforcement	–
Outside compound	NBR
Outside colour	Black
Standards	EN 16436-1:2014+A3:2020 Class 1
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
7,0	13,0		4	13	110	408407000
9,5	16,5		4	13	165	408470003

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.