




6016 Chemical Hose

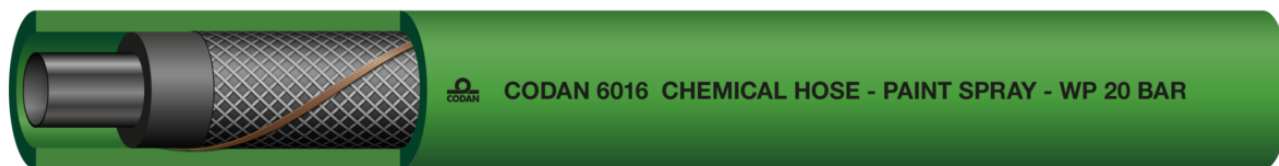

DESCRIPTION

Green, smooth, high-quality spray-paint hose with smooth polyamide inner liner. Resistant to oil, benzene, chemicals and aromatic solvents. For use in the industrial paint sector for various purposes. Silicone-free surface ensures problem-free painting. For maximum safety, please consult the chemical resistance list. Care must be taken when fitting connectors because of the inner polyamide liner. Antistatic properties acc. BGR 132 through the build in copper wire.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	6016
Application	Chemical hose
Standard length	–
Working temp.	-10°C to 60°C
Inside compound	Polyamid
Inside colour	Black
Reinforcement	Polyester – Anti-static wire
Outside compound	PVC/NBR
Outside colour	Green
Standards	BGR 132
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
8,0	14,0	20	60	35	135	6016008000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.