




1703 Material Handling Hose

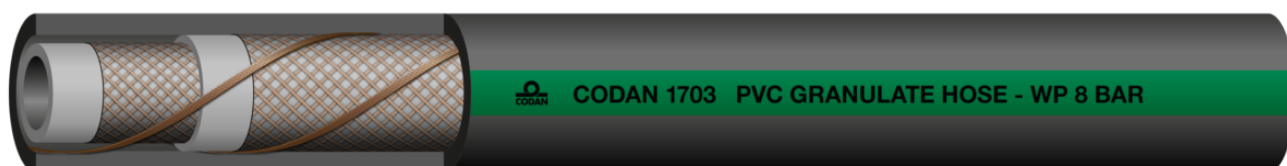

DESCRIPTION

Black, flexible, wrapped pressure hose with light, smooth, strong inner lining which, together with the anti-static wires incorporated in the hose, ensures reliable transport of the medium. Specially developed for PVC granulates, but the light inner lining also makes it suitable for coarse foodstuffs.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	1703
Application	PVC Granulate
Standard length	40 metres
Working temp.	-30°C to 90°C
Inside compound	SBR/NR
Inside colour	Black
Reinforcement	Polyester with 2 Anti-static wires
Outside compound	SBR
Outside colour	Black
Standards	FDA
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
51,0	67,4	8	24	-	1940	1703051000
63,0	81,0	8	24	-	2440	1703063000
76,0	95,2	8	24	-	2980	1703076000
80,0	100,4	8	24	-	3630	1703080000
90,0	109,2	8	24	-	4040	1703090000
102,0	123,6	8	24	-	5000	1703102000
102,0	122,4	8	24	-	4500	1703103000
110,0	130,0	8	24	-	5200	1703110000
127,0	149,0	8	24	-	6240	1703127000
152,0	176,0	8	24	-	7470	1703152000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.