




8519 Breathing Hose

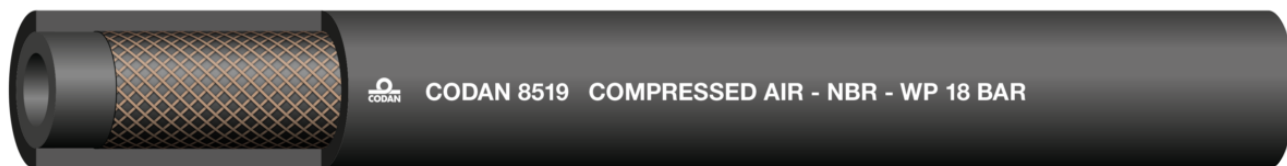

DESCRIPTION

New, improved, black, flexible lightweight hose. Inner liner with vanilla aroma (available without vanilla to order). For use as a flexible air hose on pressure cylinders, e.g. for fire brigade smoke helmets. Conforms to DIN 58648: 1989 concerning lightweight hoses. Crimped-on fittings must always be used (without crimped-on fittings, the requirements of EN 139 apply).

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	8519
Application	Breathing hose, Compressed air
Standard length	50 metres
Working temp.	-40°C to 70°C
Inside compound	NBR
Inside colour	Black
Reinforcement	PVA
Outside compound	NBR/PVC
Outside colour	Black
Standards	To Customer Spec.
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
7,0	13,9	18	100	55	171	8519070000
7,4	14,6	18	100	60	172	8519074000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.