


1206 COOLANT HOSE

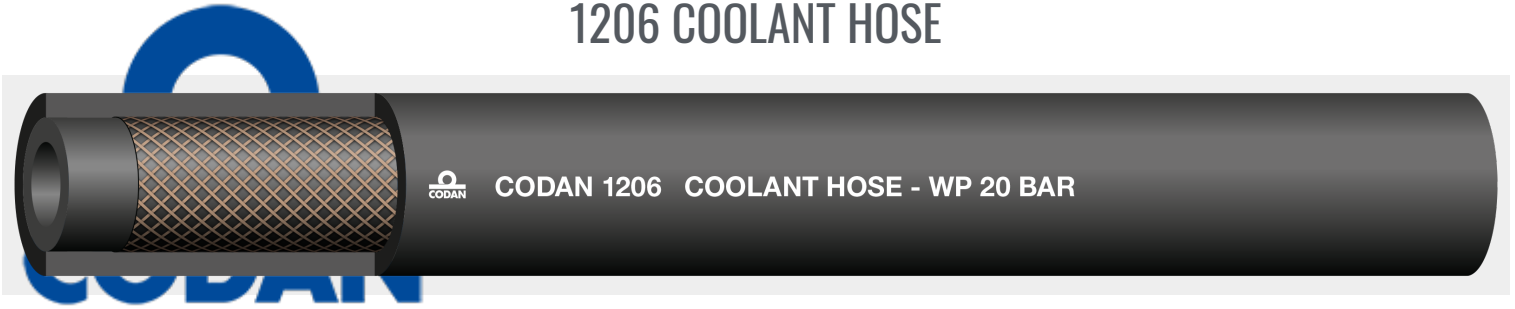

Customer specified Black Hose, made specially with a cover for use in oil/greasy environments around moulding machines. The Liner ensures cooling of the moulding machine. The hose is outside smooth till/incl. 25mm and wrapped from 32mm and up- Length from 32mm is 40mtr. The indicated bend radius is an estimate, calculated on values for hoses without steel helix wire.

For further information please contact Codan.

Customer specified Black Hose, made specially with a cover for use in oil/greasy environments around moulding machines. The Liner ensures cooling of the moulding machine. The hose is outside smooth till/incl. 25mm and wrapped from 32mm and up- Length from 32mm is 40mtr. The indicated bend radius is an estimate, calculated on values for hoses without steel helix wire.

For further information please contact Codan.

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.



This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.