




# 3106 Fuel Hose

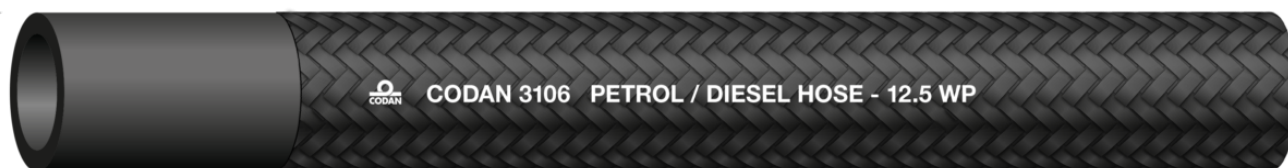

## DESCRIPTION

Flexible, black, braided hose for leaded or unleaded petrol. For fuel pipes, e.g. connecting carburettor and fuel pump, in cars, motorcycles, mopeds, garden tractors, etc. Based on DIN 73379 B:1984. Normally installed using hose clamps. Must not be used in cars with injection systems.

Please contact Codan for further information.

## ADDITIONAL INFORMATION

Type no.	3106
Application	Diesel, Fuel hose
Standard length	30 metres
Working temp.	-30°C to 100°C
Inside compound	NBR/PVC
Inside colour	Black
Reinforcement	PVA Polyester
Outside compound	Polyester
Outside colour	Black
Standards	–
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
3,2	7,2	13	50	20	44	3106032000
3,5	7,5	13	50	20	46	3106035000
4,0	9,0	11	45	20	68	3106040000
4,5	9,5	11	45	20	73	3106045000
5,0	10,0	10	42	20	80	3106050000
5,5	10,5	10	39	20	90	3106055000
6,0	11,0	10	39	20	95	3106060000
6,5	11,5	10	39	20	95	3106065000
7,0	12,0	9	35	20	100	3106070000
7,5	12,5	9	35	30	105	3106075000
8,0	13,0	8	32	30	110	3106080000
9,0	14,0	6	23	40	123	3106090000
9,5	15,0	6	23	40	130	3106095000
10,0	15,0	6	23	40	133	3106100000
11,0	16,0	5	20	40	144	3106110000
12,0	17,0	5	20	40	160	3106120000
12,7	17,7	5	15	40	180	3106127000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.