




3310 Air - Water Hose

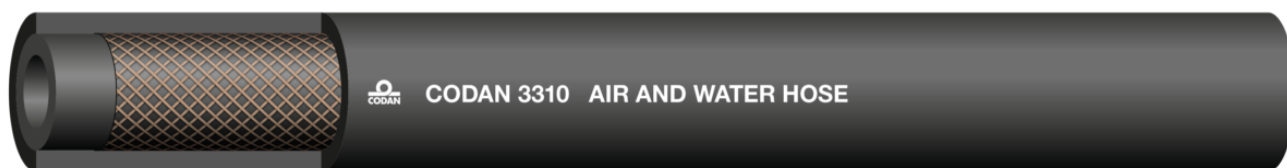

DESCRIPTION

Black, flexible universal hose for air and water.
High-quality EPDM inside and outside ensures good weather and ozone resistance in any environment.
For use in industrial applications for cold and hot water, compressed air and chemicals (acids excepted). Resistant to acetates and ketones.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	3310
Application	Air – water hose
Standard length	50 metres
Working temp.	-40°C to 100°C
Inside compound	EPDM
Inside colour	Black
Reinforcement	Polyester
Outside compound	EPDM
Outside colour	Black
Standards	ISO 1403: 2019 type 2
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
6,3	13,1	10	40	40	142	3310006000
7,9	14,7	10	40	44	166	3310008000
9,5	16,3	10	40	50	191	3310010000
12,7	19,9	10	40	60	254	3310013000
15,9	23,1	10	40	70	305	3310016000
19,1	27,1	10	40	80	402	3310019000
25,4	33,6	9	33	110	525	3310025000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.