




4830 Air - Water Hose

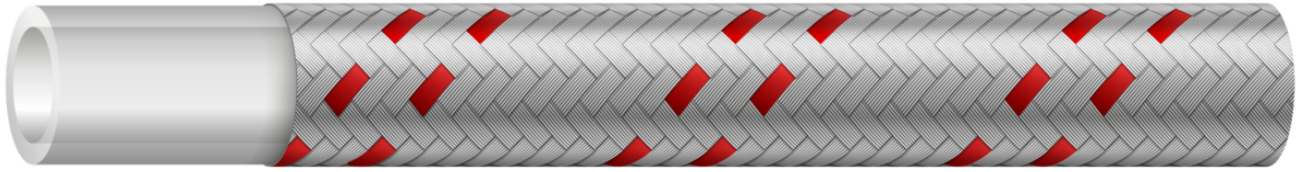

DESCRIPTION

AlSi304 Stainless Steel braided, flexible silicone hose made in heat resistant material.

Common applications: Commercial vehicle heating and cooling. High temperature air and water applications in general Cooling systems in generators and fixed engines.

Ask Codan for further information.

ADDITIONAL INFORMATION

Type no.	4830
Application	Air – water hose
Standard length	25 metres
Working temp.	-40°C to 170°C
Inside compound	Silicone
Inside colour	Transparent
Reinforcement	Stainless steel braided – red
Outside compound	–
Outside colour	Grey
Standards	–
Std. branding	–

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
9,5	14,0	25	75	20	140	4830010000
13,0	17,5	25	75	38	280	4830013000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.